



geboplast

COMPLETE RANGE OF TYPES

Compression fittings and saddles:

Our plastic compression fittings and saddles are available with the following diameters, from 16 mm to 110:

	CONNECTIONS	P. 156
	Female or male thread.	
	COUPLINGS	P. 158
	Couplings and reduced couplings with clamping on both sides.	
	T-PIECES	P. 160
	T-pieces with clamping on three sides; with reduced outlet; T-pieces with outlet with male or female thread.	
	ELBOWS 90°	P. 164
	Elbows 90° with clamping on both sides or elbows with outlet with female or male thread.	
	VARIOUS SPECIAL SOLUTIONS	P. 167
	Compression fittings with flange adaptor. Compression fittings with wall attachment and end caps.	
	SPARE PARTS FOR PLASTIC FITTINGS	P. 170
	SADDLES	P. 171
	Suitable for making additional branches in water-bearing PE pipes	
	SUPPLEMENTARY ASSORTMENT PLAST COMPRESSION FITTINGS	P. 174
	ASSEMBLY INSTRUCTIONS	P. 175

IMPORTANT INFORMATION

Tests:

Our compression fittings have been tested for PE pipes according to DIN 8074 or DIN EN 12201; DVGW-Reg. No. DW-8616BT0102.

All parts in contact with drinking water comply with the current hygienic requirements.

Screwed connections and flange connections:

- Flange adaptor according to DIN EN 1092-1
- Connecting threads according to ISO 7/1 or DIN EN 10226-1

Materials:

- **Body:** Copolymer (PP-B), UV-resistant
- **Pressure ring:** Polypropylene
- **Cone nut:** Polypropylene, UV-resistant
- **Compression ring:** Polyacetal POM
- **O-ring:** NBR/EPDM certified for drinking water
- **Reinforcement ring:** Stainless steel, AISI 430, for female threads from 1 1/4" to 4"

Medium: Drinking water

Pressure stages:

At temperatures up to 25°C, our plastic compression fittings in sizes 16 - 63 mm are approved for PN 16 while sizes 75 - 110 are approved for PN 10.

The changes of pressure stages according to temperature are given in the table below.

Pressure stages according to temperature:

Temperature in °C	0 to 25	26 to 35	36 to 45
16 - 63	16	12.5	10
75 - 110	10	8	6

CONNECTION, WITH FEMALE THREAD (FROM 1 1/4" WITH REINFORCEMENT RING)




DN	Pipe outer-Ø [mm] x Connecting thread	Code
10	16 x 1/2"	13011601
10	16 x 3/4"	13011602
15	20 x 1/2"	13012001
15	20 x 3/4"	13012002
20	25 x 1/2"	13012501
20	25 x 3/4"	13012502
20	25 x 1"	13012503
25	32 x 1/2"	13013201
25	32 x 3/4"	13013202
25	32 x 1"	13013203
25	32 x 1 1/4"	13013204
32	40 x 1"	13014003
32	40 x 1 1/4"	13014004
32	40 x 1 1/2"	13014005
40	50 x 1 1/4"	13015004
40	50 x 1 1/2"	13015005
40	50 x 2"	13015006
50	63 x 1 1/4"	13016304
50	63 x 1 1/2"	13016305
50	63 x 2"	13016306
65	75 x 2"	13017506
65	75 x 2 1/2"	13017507
80	90 x 2 1/2"	13019007
80	90 x 3"	13019008
100	110 x 3"	130111008
100	110 x 4"	130111009

DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	1/2"	13011601	59	39	17	0.022
10	16	3/4"	13011602	60	39	17	0.022
15	20	1/2"	13012001	67	46	21	0.032
15	20	3/4"	13012002	68	46	21	0.034
20	25	1/2"	13012501	73	55	26	0.055
20	25	3/4"	13012502	76	55	26	0.058
20	25	1"	13012503	78	55	26	0.059
25	32	1/2"	13013201	83	64	33	0.081
25	32	3/4"	13013202	84	64	33	0.083
25	32	1"	13013203	86	64	33	0.086
25	32	1 1/4"	13013204	89	64	33	0.111
32	40	1"	13014003	101	74	42	0.132
32	40	1 1/4"	13014004	102	74	42	0.149
32	40	1 1/2"	13014005	100	74	42	0.160
40	50	1 1/4"	13015004	122	87	51	0.227
40	50	1 1/2"	13015005	120	87	51	0.226
40	50	2"	13015006	125	87	51	0.232
50	63	1 1/4"	13016304	134	107	65	0.340
50	63	1 1/2"	13016305	139	107	65	0.383
50	63	2"	13016306	138	107	65	0.389
65	75	2"	13017506	181	131	78	0.630
65	75	2 1/2"	13017507	187	131	78	0.646
80	90	2 1/2"	13019007	209	154	92	0.947
80	90	3"	13019008	216	154	92	1.013
100	110	3"	130111008	245	185	112	1.650
100	110	4"	130111009	251	185	112	1.650

CONNECTION, WITH MALE THREAD



DN	Pipe outer-Ø [mm] x Connecting thread	Code	DN	Pipe outer-Ø [mm] x Connecting thread	Code
10	16 x 1/2"	13001601	40	50 x 1 1/2"	13005005
10	16 x 3/4"	13001602	40	50 x 2"	13005006
15	20 x 1/2"	13002001	50	63 x 1 1/2"	13006305
15	20 x 3/4"	13002002	50	63 x 2"	13006306
20	25 x 1/2"	13002501	50	63 x 2 1/2"	13006307
20	25 x 3/4"	13002502	65	75 x 2"	13007506
20	25 x 1"	13002503	65	75 x 2 1/2"	13007507
25	32 x 3/4"	13003202	65	75 x 3"	13007508
25	32 x 1"	13003203	80	90 x 2"	13009006
25	32 x 1 1/4"	13003204	80	90 x 2 1/2"	13009007
32	40 x 1"	13004003	80	90 x 3"	13009008
32	40 x 1 1/4"	13004004	80	90 x 4"	13009009
32	40 x 1 1/2"	13004005	100	110 x 3"	130011008
40	50 x 1 1/4"	13005004	100	110 x 4"	130011009


DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	1/2"	13001601	57	39	17	0.017
10	16	3/4"	13001602	58	39	17	0.019
15	20	1/2"	13002001	64	46	21	0.029
15	20	3/4"	13002002	67	46	21	0.029
20	25	1/2"	13002501	72	55	26	0.052
20	25	3/4"	13002502	73	55	26	0.052
20	25	1"	13002503	76	55	26	0.055
25	32	3/4"	13003202	81	64	33	0.079
25	32	1"	13003203	84	64	33	0.081
25	32	1 1/4"	13003204	85	64	33	0.085
32	40	1"	13004003	100	74	42	0.121
32	40	1 1/4"	13004004	101	74	42	0.131
32	40	1 1/2"	13004005	98	74	42	0.153
40	50	1 1/4"	13005004	121	87	51	0.210
40	50	1 1/2"	13005005	120	87	51	0.210
40	50	2"	13005006	125	87	51	0.220
50	63	1 1/2"	13006305	137	107	65	0.348
50	63	2"	13006306	137	107	65	0.362
50	63	2 1/2"	13006307	144	107	65	0.364
65	75	2"	13007506	180	131	78	0.575
65	75	2 1/2"	13007507	186	131	78	0.598
65	75	3"	13007508	189	131	78	0.615
80	90	2"	13009006	205	154	92	1.018
80	90	2 1/2"	13009007	212	154	92	0.908
80	90	3"	13009008	214	154	92	0.925
80	90	4"	13009009	221	154	92	0.989
100	110	3"	130011008	246	185	112	1.569
100	110	4"	130011009	254	185	112	1.603

COUPLINGS, CLAMPING ON BOTH SIDES



DN	Pipe outer-Ø [mm]	Code
10	16 x 16	130216
15	20 x 20	130220
20	25 x 25	130225
25	32 x 32	130232
32	40 x 40	130240
40	50 x 50	130250
50	63 x 63	130263
65	75 x 75	130275
80	90 x 90	130290
100	110 x 110	1302110




DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	130216	77	39	17	0.029
15	20	130220	92	46	21	0.050
20	25	130225	108	55	26	0.092
25	32	130232	124	64	33	0.142
32	40	130240	151	74	42	0.228
40	50	130250	189	87	51	0.371
50	63	130263	218	107	65	0.641
65	75	130275	281	131	78	1.025
80	90	130290	330	154	92	1.614
100	110	1302110	390	185	112	2.796

COUPLING, CLAMPING ON BOTH SIDES, REDUCED



DN	Pipe outer-Ø [mm]	Code
15 x 10	20 x 16	13062016
20 x 15	25 x 20	13062520
25 x 20	32 x 25	13063225
32 x 20	40 x 25	13064025
32 x 25	40 x 32	13064032
40 x 20	50 x 25	13065025
40 x 25	50 x 32	13065032
40 x 32	50 x 40	13065040
50 x 32	63 x 40	13066340
50 x 40	63 x 50	13066350
65 x 40	75 x 50	13067550
65 x 50	75 x 63	13067563
80 x 50	90 x 63	13069063
80 x 65	90 x 75	13069075
100 x 80	110 x 90	130611090




DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	B' [mm]	D' [mm]	Weight [kg]
15 x 10	20 x 16	13062016	84	46	21	39	17	0.037
20 x 15	25 x 20	13062520	99	55	26	46	21	0.073
25 x 20	32 x 25	13063225	115	64	33	55	26	0.119
32 x 20	40 x 25	13064025	134	74	42	55	26	0.157
32 x 25	40 x 32	13064032	138	74	42	64	33	0.186
40 x 20	50 x 25	13065025	152	87	51	55	26	0.245
40 x 25	50 x 32	13065032	150	87	51	64	33	0.249
40 x 32	50 x 40	13065040	165	87	51	74	42	0.289
50 x 32	63 x 40	13066340	174	107	65	74	42	0.432
50 x 40	63 x 50	13066350	195	107	65	87	51	0.500
65 x 40	75 x 50	13067550	245	131	78	87	51	0.740
65 x 50	75 x 63	13067563	257	131	78	107	65	0.859
80 x 50	90 x 63	13069063	280	154	92	107	65	1.176
80 x 65	90 x 75	13069075	315	154	92	131	78	1.362
100 x 80	110 x 90	130611090	370	185	112	154	92	2.285

T-PIECES, WITH CLAMPING ON THREE SIDES



DN	Pipe outer-Ø [mm]	Code
10	16 x 16 x 16	131016
15	20 x 20 x 20	131020
20	25 x 25 x 25	131025
25	32 x 32 x 32	131032
32	40 x 40 x 40	131040
40	50 x 50 x 50	131050
50	63 x 63 x 63	131063
65	75 x 75 x 75	131075
80	90 x 90 x 90	131090
100	110 x 110 x 110	1310110

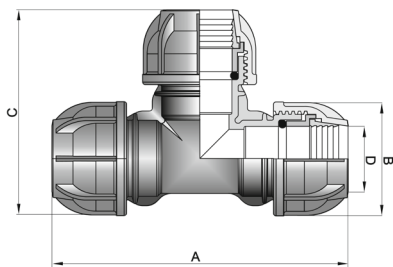


DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	C [mm]	Weight [kg]
10	16	131016	96	39	17	67	0.044
15	20	131020	121	46	21	84	0.071
20	25	131025	145	55	26	100	0.151
25	32	131032	170	64	33	116	0.238
32	40	131040	195	74	42	135	0.371
40	50	131050	245	87	51	175	0.617
50	63	131063	290	107	65	203	1.070
65	75	131075	365	131	78	250	1.674
80	90	131090	415	154	92	285	2.638
100	110	1310110	535	185	112	350	4.610

T-PIECES, WITH CLAMPING ON THREE SIDES, OUTLET REDUCED




DN	Pipe outer-Ø [mm]	Code
20 x 15	25 x 20 x 25	13122520
25 x 20	32 x 25 x 32	13123225
32 x 25	40 x 32 x 40	13124032
40 x 32	50 x 40 x 50	13125040
50 x 40	63 x 50 x 63	13126350

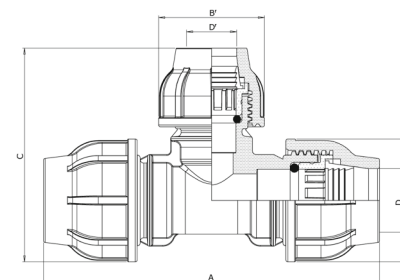

DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	C [mm]	B' [mm]	D' [mm]	Weight [kg]
20 x 15	25 x 20	13122520	145	55	26	91	46	21	0.104
25 x 20	32 x 25	13123225	170	64	33	110	55	26	0.203
32 x 25	40 x 32	13124032	195	74	42	129	64	33	0.330
40 x 32	50 x 40	13125040	245	87	51	152	74	42	0.522
50 x 40	63 x 50	13126350	294	107	65	182	87	51	0.935

T-PIECES, OUTLET WITH MALE THREAD

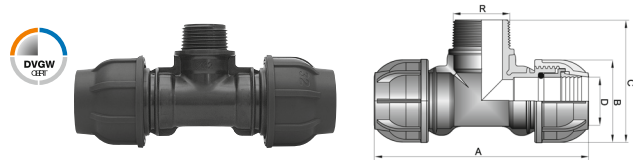


DN	Pipe outer- ϕ [mm] x Connecting thread x Pipe outer- ϕ [mm]	Code
10	16 x 1/2" x 16	13111601
10	16 x 3/4" x 16	13111602
15	20 x 1/2" x 20	13112001
15	20 x 3/4" x 20	13112002
20	25 x 1/2" x 25	13112501
20	25 x 3/4" x 25	13112502
20	25 x 1" x 25	13112503
25	32 x 3/4" x 32	13113202
25	32 x 1" x 32	13113203
32	40 x 1 1/4" x 40	13114004
32	40 x 1 1/2" x 40	13114005
40	50 x 1 1/2" x 50	13115005
40	50 x 2" x 50	13115006
50	63 x 2" x 63	13116306
65	75 x 2 1/2" x 75	13117507
65	75 x 3" x 75	13117508
80	90 x 3" x 90	13119008
80	90 x 4" x 90	13119009
100	110 x 4" x 110	131111009

DIMENSIONS AND WEIGHTS

DN	Pipe outer- ϕ [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	C [mm]	Weight [kg]
10	16	1/2"	13111601	97	39	17	54	0.035
10	16	3/4"	13111602	121	39	17	64	0.035
15	20	1/2"	13112001	120	46	21	64	0.057
15	20	3/4"	13112002	120	46	21	64	0.062
20	25	1/2"	13112501	145	55	26	72	0.107
20	25	3/4"	13112502	144	55	26	71	0.109
20	25	1"	13112503	144	55	26	76	0.116
25	32	3/4"	13113202	169	64	33	82	0.166
25	32	1"	13113203	170	64	33	86	0.170
32	40	1 1/4"	13114004	195	74	42	103	0.286
32	40	1 1/2"	13114005	194	74	42	103	0.294
40	50	1 1/2"	13115005	246	87	51	119	0.457
40	50	2"	13115006	246	87	51	125	0.481
50	63	2"	13116306	290	107	65	143	0.836
65	75	2 1/2"	13117507	365	131	78	174	1.282
65	75	3"	13117508	365	131	78	180	1.333
80	90	3"	13119008	415	154	92	200	2.004
80	90	4"	13119009	415	154	92	210	2.098
100	110	4"	131111009	515	185	112	255	3.600

T-PIECES, OUTLET WITH FEMALE THREAD (FROM 1 1/4" WITH REINFORCEMENT RING)

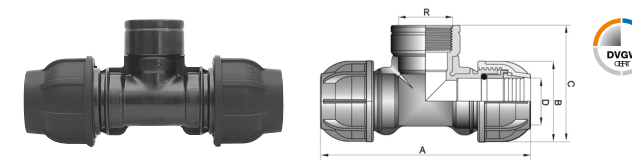

DN	Pipe outer- ϕ [mm] x Connecting thread x Pipe outer- ϕ [mm]	Code
10	16 x 1/2" x 16	13041601
10	16 x 3/4" x 16	13041602
15	20 x 1/2" x 20	13042001
15	20 x 3/4" x 20	13042002
20	25 x 1/2" x 25	13042501
20	25 x 3/4" x 25	13042502
20	25 x 1" x 25	13042503
25	32 x 1/2" x 32	13043201
25	32 x 3/4" x 32	13043202
25	32 x 1" x 32	13043203
32	40 x 1" x 40	13044003
32	40 x 1 1/4" x 40	13044004
32	40 x 1 1/2" x 40	13044005
40	50 x 1 1/4" x 50	13045004
40	50 x 1 1/2" x 50	13045005
40	50 x 2" x 50	13045006
50	63 x 1 1/2" x 63	13046305
50	63 x 2" x 63	13046306
65	75 x 2" x 75	13047506
65	75 x 2 1/2" x 75	13047507
65	75 x 3" x 75	13047508
80	90 x 2 1/2" x 90	13049007
80	90 x 3" x 90	13049008
80	90 x 4" x 90	13049009
100	110 x 4" x 110	130411009


DIMENSIONS AND WEIGHTS

DN	Pipe outer- ϕ [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	C [mm]	Weight [kg]
10	16	1/2"	13041601	96	39	17	54	0.035
10	16	3/4"	13041602	122	39	17	68	0.042
15	20	1/2"	13042001	120	46	21	64	0.060
15	20	3/4"	13042002	120	46	21	68	0.067
20	25	1/2"	13042501	144	55	26	82	0.107
20	25	3/4"	13042502	146	55	26	76	0.113
20	25	1"	13042503	145	55	26	77	0.122
25	32	1/2"	13043201	170	64	33	78	0.170
25	32	3/4"	13043202	170	64	33	84	0.175
25	32	1"	13043203	171	64	33	91	0.182
32	40	1"	13044003	195	74	42	103	0.291
32	40	1 1/4"	13044004	195	74	42	104	0.304
32	40	1 1/2"	13044005	195	74	42	105	0.331
40	50	1 1/4"	13045004	249	87	51	118	0.480
40	50	1 1/2"	13045005	249	87	51	118	0.505
40	50	2"	13045006	244	87	51	122	0.505
50	63	1 1/2"	13046305	290	107	65	135	0.855
50	63	2"	13046306	290	107	65	141	0.852
65	75	2"	13047506	370	131	78	168	1.359
65	75	2 1/2"	13047507	370	131	78	174	1.304
65	75	3"	13047508	365	131	78	176	1.376
80	90	2 1/2"	13049007	425	154	92	198	2.085
80	90	3"	13049008	425	154	92	198	2.135
80	90	4"	13049009	420	154	92	203	2.176
100	110	4"	130411009	515	185	112	245	3.643

ELBOW 90°, WITH CLAMPING ON BOTH SIDES




DN	Pipe outer-Ø [mm]	Code
10	16 x 16	130816
15	20 x 20	130820
20	25 x 25	130825
25	32 x 32	130832
32	40 x 40	130840
40	50 x 50	130850
50	63 x 63	130863
65	75 x 75	130875
80	90 x 90	130890
100	110 x 110	1308110



DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	130816	48	39	17	0.030
15	20	130820	59	46	21	0.047
20	25	130825	72	55	26	0.099
25	32	130832	84	64	33	0.158
32	40	130840	95	74	42	0.246
40	50	130850	122	87	51	0.422
50	63	130863	142	107	65	0.729
65	75	130875	177	131	78	1.138
80	90	130890	212	154	92	1.801
100	110	1308110	260	185	112	3.158

ELBOW 90°, ONE SIDE WITH MALE THREAD



DN	Pipe outer-Ø [mm] x Connecting thread	Code
10	16 x 1/2"	13091601
10	16 x 3/4"	13091602
15	20 x 1/2"	13092001
15	20 x 3/4"	13092002
20	25 x 1/2"	13092501
20	25 x 3/4"	13092502
20	25 x 1"	13092503
25	32 x 3/4"	13093202
25	32 x 1"	13093203
32	40 x 1"	13094003
32	40 x 1 1/4"	13094004
32	40 x 1 1/2"	13094005
40	50 x 1 1/2"	13095005
40	50 x 2"	13095006
50	63 x 2"	13096306
65	75 x 2 1/2"	13097507
65	75 x 3"	13097508
80	90 x 3"	13099008
80	90 x 4"	13099009
100	110 x 4"	130911009


DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	1/2"	13091601	48	39	17	0.020
10	16	3/4"	13091602	49	39	17	0.020
15	20	1/2"	13092001	60	46	21	0.032
15	20	3/4"	13092002	60	46	21	0.036
20	25	1/2"	13092501	72	55	26	0.052
20	25	3/4"	13092502	72	55	26	0.059
20	25	1"	13092503	72	55	26	0.064
25	32	3/4"	13093202	84	64	33	0.092
25	32	1"	13093203	84	64	33	0.093
32	40	1"	13094003	99	74	42	0.149
32	40	1 1/4"	13094004	97	74	42	0.158
32	40	1 1/2"	13094005	99	74	42	0.166
40	50	1 1/2"	13095005	122	87	51	0.241
40	50	2"	13095006	122	87	51	0.294
50	63	2"	13096306	143	107	65	0.415
65	75	2 1/2"	13097507	178	131	78	0.745
65	75	3"	13097508	181	131	78	0.796
80	90	3"	13099008	212	154	92	1.149
80	90	4"	13099009	212	154	92	1.223
100	110	4"	130911009	260	185	112	2.099

ELBOW 90°, ONE SIDE WITH FEMALE THREAD (FROM 1 1/4" WITH REINFORCEMENT RING)



DN	Pipe outer-Ø [mm] x Connecting thread	Code
10	16 x 1/2"	13131601
10	16 x 3/4"	13131602
15	20 x 1/2"	13132001
15	20 x 3/4"	13132002
20	25 x 1/2"	13132501
20	25 x 3/4"	13132502
20	25 x 1"	13132503
25	32 x 3/4"	13133202
25	32 x 1"	13133203
32	40 x 1"	13134003
32	40 x 1 1/4"	13134004
40	50 x 1 1/2"	13135005
50	63 x 1 1/2"	13136305
50	63 x 2"	13136306
65	75 x 2 1/2"	13137507
65	75 x 3"	13137508
80	90 x 3"	13139008
80	90 x 4"	13139009
100	110 x 4"	131311009




DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread R ISO 7/1	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	1/2"	13131601	49	39	17	0.024
10	16	3/4"	13131602	50	39	17	0.028
15	20	1/2"	13132001	62	46	21	0.033
15	20	3/4"	13132002	60	46	21	0.040
20	25	1/2"	13132501	74	55	26	0.060
20	25	3/4"	13132502	74	55	26	0.065
20	25	1"	13132503	74	55	26	0.069
25	32	3/4"	13133202	87	64	33	0.095
25	32	1"	13133203	87	64	33	0.097
32	40	1"	13134003	96	74	42	0.165
32	40	1 1/4"	13134004	97	74	42	0.176
40	50	1 1/2"	13135005	124	87	51	0.299
50	63	1 1/2"	13136305	144	107	65	0.489
50	63	2"	13136306	145	107	65	0.488
65	75	2 1/2"	13137507	185	131	78	0.809
65	75	3"	13137508	180	131	78	0.843
80	90	3"	13139008	215	154	92	1.242
80	90	4"	13139009	230	154	92	1.283
100	110	4"	131311009	265	185	112	2.168

COMPRESSION FITTINGS, WITH FLANGE ADAPTOR



DN	Pipe outer-Ø [mm]	Flange connection/ Pressure	Number of boreholes	Code
40	50	(DN 50), PN 10/16	4	13625050
50	63	(DN 50), PN 10/16	4	13626350
50	63	(DN 65), PN 10/16	4	13626365
65	75	(DN 65), PN 10/16	4	13627565
65	75	(DN 80), PN 10/16	8	13627580
80	90	(DN 80), PN 10/16	8	13629080
80	90	(DN 100), PN 10/16	8	136290100
100	110	(DN 100), PN 10/16	8	1362110100




DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Flange connection/ Pressure	Code	A [mm]	B [mm]	D [mm]	E [mm]	F [mm]	C [mm]	Weight [kg]
40	50	(DN 50), PN 10/16	13625050	106	87	51	165	125	18	1.446
50	63	(DN 50), PN 10/16	13626350	118	107	65	165	125	18	1.352
50	63	(DN 65), PN 10/16	13626365	123	107	65	185	145	18	2.260
65	75	(DN 65), PN 10/16	13627565	163	131	78	185	145	18	1.995
65	75	(DN 80), PN 10/16	13627580	163	131	78	202	160	18	2.300
80	90	(DN 80), PN 10/16	13629080	189	154	92	202	160	18	2.300
80	90	(DN 100), PN 10/16	136290100	189	154	92	220	180	18	2.035
100	110	(DN 100), PN 10/16	1362110100	224	185	112	220	180	18	3.000

COMPRESSION FITTINGS, WITH WALL ATTACHMENT AND FEMALE OUTLET



DN	Pipe outer-Ø [mm] x Connecting thread	Code
15	20 x 1/2"	13612001
20	25 x 3/4"	13612502

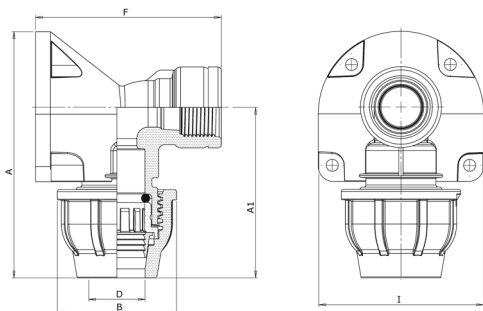


DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread R ISO 7/1	Code	A [mm]	A1 [mm]	B [mm]	D [mm]	F [mm]	I [mm]	Weight [kg]
15	20	1/2"	13612001	91	67	47	22	63	54	0.060
20	25	3/4"	13612502	113	78	55	26	86	76	0.090

END CAPS WITH CLAMPING CONNECTION



DN	Pipe outer-Ø [mm]	Code
10	16	130716
15	20	130720
20	25	130725
25	32	130732
32	40	130740
40	50	130750
50	63	130763
65	75	130775
80	90	130790
100	110	1307110



DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Code	A [mm]	B [mm]	D [mm]	Weight [kg]
10	16	130716	41	39	17	0.016
15	20	130720	50	46	21	0.027
20	25	130725	58	55	26	0.049
25	32	130732	66	64	33	0.077
32	40	130740	79	74	42	0.124
40	50	130750	98	87	51	0.203
50	63	130763	113	107	65	0.350
65	75	130775	154	131	78	0.568
80	90	130790	179	154	92	0.895
100	110	1307110	210	185	112	1.519

ACCESSORIES



CONE NUTS

Size [mm]	Code	Size [mm]	Code
16	134316	50	134350
20	134320	63	134363
25	134325	75	134375
32	134332	90	134390
40	134340	110	1343110



O-RING

Size [mm]	Code	Size [mm]	Code
16	134716	50	134750
20	134720	63	134763
25	134725	75	134775
32	134732	90	134790
40	134740	110	1347110



PRESSURE RINGS

Size [mm]	Code	Size [mm]	Code
16	137016	50	137050
20	137020	63	137063
25	137025	75	137075
32	137032	90	137090
40	137040	110	1370110




COMPRESSION RINGS

Size [mm]	Code	Size [mm]	Code
16	134416	50	134450
20	134420	63	134463
25	134425	75	134475
32	134432	90	134490
40	134440	110	1344110

INSTALLATION BELTS

Size [mm]	Code
25 - 63	13272563
25 - 110	132725110



ASSEMBLY INSTRUCTIONS 16 - 63 MM

Stages of assembly:

1. Cut the pipe at right angle and chamfer the edge with a suitable tool (photo 1).
2. The O-ring is pre-lubricated for easy installation. Do not use oil-containing lubricants. Only use lubricants approved for drinking water systems.
3. Loosen the cone nut on the fitting thread by 3 - 4 turns (photo 2). Do not unscrew the nut to the end of the thread!
4. Mark the insertion depth on the pipe (photo 3).
5. Push the pipe in up to the stop in the screw connection. Make sure that the pipe is inserted over the sealing element (photo 4).
6. Tighten the cone nut by hand (photo 5).
7. Now screw the cone nut tight using the assembly belt or another suitable tool for plastic compression fittings (photo 6).



ASSEMBLY INSTRUCTIONS 75 - 110 MM

Stages of assembly:

1. Cut the pipe at right angle and remove burrs (photo 1).
2. The O-ring is pre-lubricated for easy installation. Do not use oil-containing lubricants. Only use lubricants approved for drinking water systems.
3. Loosen the cone nut on the fitting thread by 3 - 4 turns. Do not unscrew the nut to the end of the thread!
4. Put your hand into the fitting and pull out the O-ring and the pressure ring as far forward as possible (photo 2) so that the pipe can be pushed in without any resistance.
5. Push the pipe in up to the stop in the screw connection. Make sure that the pipe is inserted over the sealing element.
6. Tighten the cone nut by hand.
7. Now screw the cone nut tight using the assembly belt or another suitable tool for plastic compression fittings (photo 3).



SADDLES - IMPORTANT INFORMATION

It is possible to install additional branches in water-bearing PE pipe line systems by using our saddles (pipes conforming to DIN 8074 respectively EN 12201).

TESTS

All parts in contact with drinking water comply with the current hygienic requirements.

MATERIALS

Top and bottom parts of the saddle:

Polypropylene copolymer (PP-B), UV-resistant

Seal: NBR/EPDM certified for drinking water

Reinforcement ring:

Stainless steel, AISI 430 for sizes 1 1/4" and above

PRESSURE STAGES


At temperatures of up to 25°C, our saddles can be used in pressure stages PN 16 to PN 6.

The pressure stages depend on the dimensions and threaded connectors, so a corresponding pressure stage is given for each article.

SADDLE WITH TWO ATTACHMENT SCREWS




DN	Pipe outer-Ø [mm] x Connecting thread	Pressure	Code
15	20 x 1/2"	PN 16	13212001
20	25 x 1/2"	PN 16	13212501
20	25 x 3/4"	PN 16	13212502
25	32 x 1/2"	PN 16	13213201
25	32 x 3/4"	PN 16	13213202
25	32 x 1"	PN 16	13213203
32	40 x 1/2"	PN 16	13214001
32	40 x 3/4"	PN 16	13214002
32	40 x 1"	PN 16	13214003
40	50 x 1/2"	PN 16	13215001
40	50 x 3/4"	PN 16	13215002
40	50 x 1"	PN 16	13215003



DIMENSIONS AND WEIGHTS

DN	Pipe outer-Ø [mm]	Connecting thread G	Code	L [mm]	E [mm]	F [mm]	Screws	Weight [kg]
15	20	1/2"	13212001	33	62	38	M6 x 35	0.047
20	25	1/2"	13212501	33	72	48	M6 x 35	0.060
20	25	3/4"	13212502	34	72	48	M8 x 45	0.070
25	32	1/2"	13213201	39	87	52	M8 x 45	0.110
25	32	3/4"	13213202	40	87	52	M8 x 45	0.113
25	32	1"	13213203	47	88	56	M8 x 45	0.137
32	40	1/2"	13214001	42	88	56	M8 x 45	0.117
32	40	3/4"	13214002	42	88	56	M8 x 45	0.118
32	40	1"	13214003	47	88	56	M8 x 45	0.128
40	50	1/2"	13215001	46	95	57	M8 x 45	0.119
40	50	3/4"	13215002	48	95	57	M8 x 45	0.124
40	50	1"	13215003	51	95	57	M8 x 45	0.132

SADDLE WITH FOUR ATTACHMENT SCREWS

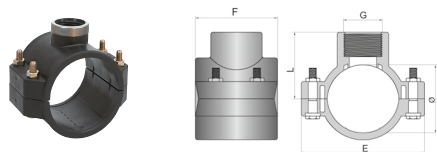

DN	Pipe outer Ø [mm] x Connecting thread	Pressure	Code
50	63 x 1/2"	PN 16	13236301
50	63 x 3/4"	PN 16	13236302
50	63 x 1"	PN 16	13236303
50	63 x 1 1/4"	PN 16	13236304
50	63 x 1 1/2"	PN 10	13236305
65	75 x 1/2"	PN 16	13237501
65	75 x 3/4"	PN 16	13237502
65	75 x 1"	PN 16	13237503
65	75 x 1 1/4"	PN 16	13237504
65	75 x 1 1/2"	PN 10	13237505
65	75 x 2"	PN 10	13237506
80	90 x 1/2"	PN 16	13239001
80	90 x 3/4"	PN 16	13239002
80	90 x 1"	PN 16	13239003
80	90 x 1 1/4"	PN 16	13239004
80	90 x 1 1/2"	PN 10	13239005
80	90 x 2"	PN 10	13239006
100	110 x 1/2"	PN 16	132311001
100	110 x 3/4"	PN 16	132311002
100	110 x 1"	PN 16	132311003
100	110 x 1 1/4"	PN 16	132311004
100	110 x 1 1/2"	PN 10	132311005
100	110 x 2"	PN 10	132311006
100	110 x 2 1/2"	PN 6	132311007
100	110 x 3"	PN 6	132311008

DIMENSIONS AND WEIGHTS

DN	Pipe outer Ø [mm]	Connecting thread G	Code	L [mm]	E [mm]	F [mm]	Screws	Weight [kg]
50	63	1/2"	13236301	53	108	72	M8 x 45	0.210
50	63	3/4"	13236302	55	108	72	M8 x 45	0.210
50	63	1"	13236303	58	108	72	M8 x 45	0.220
50	63	1 1/4"	13236304	60	108	72	M8 x 45	0.231
50	63	1 1/2"	13236305	60	108	72	M8 x 45	0.223
65	75	1/2"	13237501	60	120	90	M8 x 60	0.330
65	75	3/4"	13237502	61	120	90	M8 x 60	0.340
65	75	1"	13237503	65	120	90	M8 x 60	0.350
65	75	1 1/4"	13237504	67	120	90	M8 x 60	0.361
65	75	1 1/2"	13237505	67	120	90	M8 x 60	0.370
65	75	2"	13237506	70	120	90	M8 x 60	0.390
80	90	1/2"	13239001	68	135	90	M8 x 60	0.360
80	90	3/4"	13239002	69	135	90	M8 x 60	0.360
80	90	1"	13239003	73	135	90	M8 x 60	0.370
80	90	1 1/4"	13239004	75	135	90	M8 x 60	0.380
80	90	1 1/2"	13239005	75	135	90	M8 x 60	0.390
80	90	2"	13239006	78	135	90	M8 x 60	0.410
100	110	1/2"	132311001	78	155	105	M8 x 60	0.450
100	110	3/4"	132311002	79	155	105	M8 x 60	0.460
100	110	1"	132311003	83	155	105	M8 x 60	0.460
100	110	1 1/4"	132311004	85	155	105	M8 x 60	0.460
100	110	1 1/2"	132311005	85	155	105	M8 x 60	0.470
100	110	2"	132311006	88	155	105	M8 x 60	0.500
100	110	2 1/2"	132311007	94	155	105	M8 x 60	0.523
100	110	3"	132311008	103	155	124	M8 x 70	0.671

ASSEMBLY INSTRUCTIONS FOR TAPPING SADDLES

Stages of assembly:

1. Mark the location of the additional outlet and make sure that the pipe is free of dirt, surface damage and marks.
2. Place the bottom part of the saddle in the correct position.
3. Insert the sealing into its place and put the top part of the saddle in the right position. Connect together both parts of the saddle.
4. Make sure that the two parts of the saddle closely match each other during assembly.
5. Insert the screws from below and tighten the nuts carefully.
6. Drill a hole in the pipe, taking care not to damage the thread and seal.

Use the distance support to protect the pipe against drilling a hole in the opposite wall.

We recommend the use of a hole saw to avoid damage to the thread or seal.



SUPPLEMENTARY ASSORTMENT PLAST COMPRESSION FITTINGS

Repair couplings for PE pipes as a complement to the GEBO Plast range



DN	Pipe outer Ø [mm]	Code
15	20 x 20	15020K0020
20	25 x 25	15025K0025
25	32 x 32	15032K0032
32	40 x 40	15040K0040
40	50 x 50	15050K0050
50	63 x 63	15063K0063
65	75 x 75	15075K0075
80	90 x 90	15090K0090
100	110 x 110	15110K0110

PLASTIC COUPLINGS WITH BALL VALVE AND QUICK RELEASE TO COMPLEMENT THE GEBOPLAST RANGE



Code	Description	[mm]
141020CN	Plastic coupling with ball valve, with quick release fastener	20 x 20
141025CN	Plastic coupling with ball valve, with quick release fastener	25 x 25
141032CN	Plastic coupling with ball valve, with quick release fastener	32 x 32
141040CN	Plastic coupling with ball valve, with quick release fastener	40 x 40
141050CN	Plastic coupling with ball valve, with quick release fastener	50 x 50
141063CN	Plastic coupling with ball valve, with quick release fastener	63 x 63

The supplementary assortment is not part of the DVGW certificate of our series geboplast.